





Holmatro V-Strut: The lightweight tool for instant, safe stabilization

- Vehicle stabilization strut with integrated head, base plate and tensioning belt with hook and ratchet mechanism
- All-in-one solution, no loose parts that may get lost
- Ready for immediate use
- Unique auto-lock system
- Fast set-up in just 15 seconds

Unique auto-lock system



- Pulls out and locks automatically in one movement
- No separate operation required to lock the strut
- Locking holes over the full strut length at very small intervals
- Enables fine length adjustment for accurate positioning of the strut
- · Quick, easy and safe



Squeeze and push mechanism



· To release the strut quickly and easily after use

Extremely lightweight



- Easy to carry
- Easy to work with
- Weighs just 7.2 kg




Serrated, multi-purpose head

- · For optimal grip
- Suitable for use with all types of vehicles

Tensioning belt



- Tensioning belt with hook and ratchet mechanism
- For quick and easy attachment to the car
- Enables the rapid creation of a stable triangle













Snap hook

• For fast and easy detachment and reattachment



Reel for tensioning belt

- Prevents tangling of tensioning belt
- For compact storage



High shoring capacity

• Up to 16 kN shoring load

• Enough to stabilize any type of car



Base plate with non-slip profile

• For optimal grip on all surfaces

• Prevents the strut from slipping

Tilting foot

• For positioning at any angle




Heat resistant cover

- Slideable, heat-resistant protection cover around tensioning belt
- Protects the belt against hot exhausts





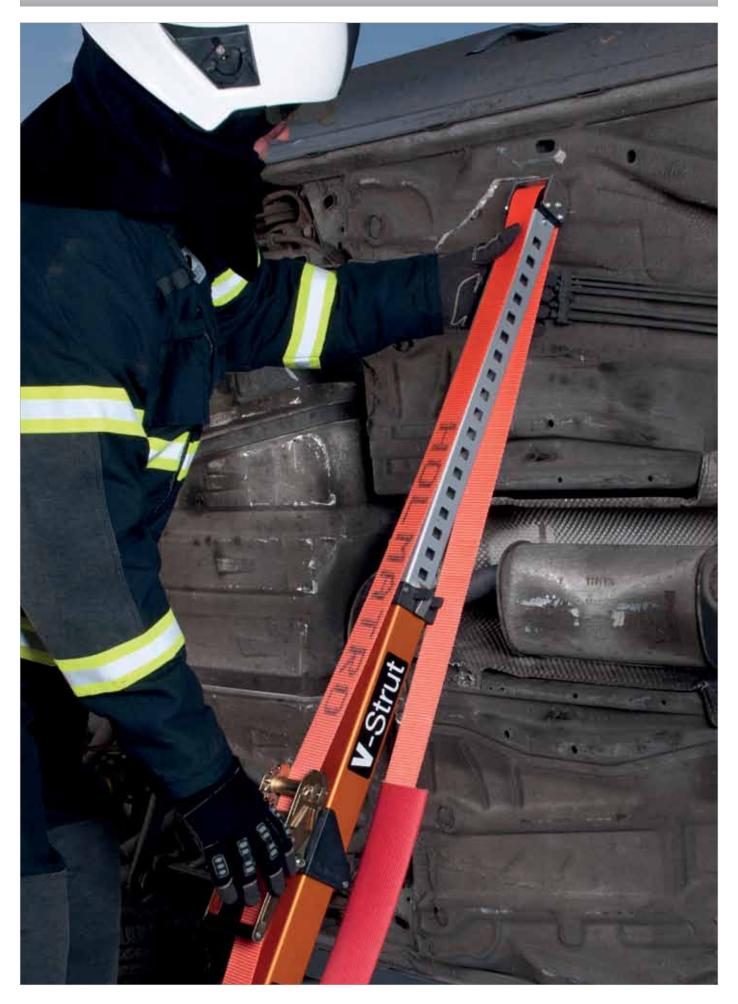







Optional accessories


- Sheet metal knife: Suitable for quick and easy creation of a fixing point in the car's bonnet, roof or boot
- Holmatro PowerShore™ base support plate for use on soft soil, which prevents the strut from sinking into the ground




Technical data V-Strut ↓	
article number	150.062.158
max. axial load (see F in drawing below)	16 kN
closed length	1080 mm
number of stroke steps	24
stroke step size	30 mm
total stroke	720 mm
extended length	1800 mm
weight	7.2 kg
dimensions (LxWxH)	1080 x 149 x 210 mm
length tensioning belt	5 m

Accessories V-Strut	↓
sheet metal knife	150.062.183
base support plate	150.011.519



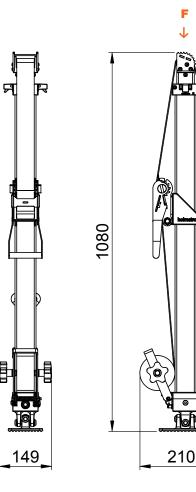

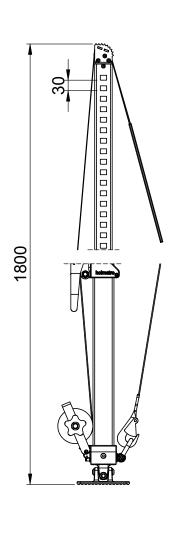



Holmatro Netherlands Rescue equipment
Raamsdonksveer, The Netherlands
T +31 (0)162 58 92 00 E rescue@holmatro.com Manufacturing, sales & service



Holmatro Group World Headquarters Raamsdonksveer, The Netherlands



Holmatro USA Glen Burnie, MD, U.S.A. Manufacturing, sales & service



Holmatro UK Nottingham, UK Sales & service



Holmatro China Suzhou, Jiangsu Province, China Sales & service



Holmatro Poland Warsaw, Poland Sales & service

www.holmatro.com

Disclaimer

While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. N.V. Holmatro and its affiliated companies (hereafter: Holmatro) cannot be held liable in any way for the consequences of activities undertaken based on this printed matter. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro (phone number: +31 (0)162-589200).

Nothing from this printed matter can be copied and/or made public in any way without the explicit authorisation of Holmatro.