

Technical specification sheet


ICU 20 S 30 | Stationary Cutter - 1 hand controlled

Specifications		
article number		170.012.059
model		ICU 20 S 30
blade type		30 standard
cutter type		stationary
short description		Stationary Cutter - 1 hand controlled
max. working pressure	bar/Mpa	500 / 50
max. cutting opening	mm	158
max. cutting force	kN/t	246 / 25.1
required oil content (effective)	cc	84
weight, ready for use	kg	26.6
temperature range	°C	-20 +80
max. cutting diameter round bar (S235 acc. to EN 10025-2)	mm	24
max. cutting diameter round tube (E235 acc. to EN 10305-1), based on wall thickness 2mm/0,08in	mm	100
catalytic converter	%	95
number of cuts per day		200
number of operating hours per day		24

Technical drawing dimensions		
dimension A	mm	651
dimension B	mm	361
dimension C	mm	312

Required Accessories	
Balancer, 25 - 30 kg	130.581.000

Accessories	
Blades, Set 10 Cable	170.013.047
Blades, Set 40 Straight	170.013.038

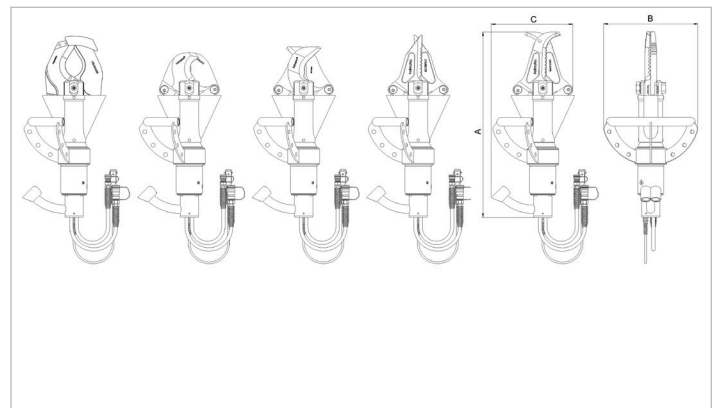

holmatro.com

© Holmatro 2024-07-04

While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. Holmatro B.V. and its affiliated companies (hereafter: Holmatro) cannot be held liable in any way for the consequences of activities undertaken on the basis of this printed matter. Values can vary within the manufacturer measurements. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro (T +31 (0)162-751480). Nothing from this printed matter can be copied and/or made public in any way without the explicit authorisation of Holmatro.