

Technical specification sheet


ICU 20 STH 40 | Stationary Cutter - 2 hand controlled

Specifications		
article number		170.012.081
model		ICU 20 STH 40
max. working pressure	psi	7252
blade type		40 straight
cutter type		stationary - horizontal assembled blades and two hand operation
short description		Stationary Cutter - 2 hand controlled
max. spreading force	lbf	20682
max. spreading opening	in	12
max. cutting force	lbf	59350
max. cutting opening	in	11.7
required oil content (effective)	oz	2.8
weight, ready for use	lb	58.6
temperature range	°F	-4 +176
max. cutting thickness flat bar (S235 acc. to EN 10025), based on strip width 10mm/0,4in	in	0.8
number of cuts per day		200
number of operating hours per day		24

Technical drawing dimensions		
dimension A	in	25.2
dimension B	in	14.2
dimension C	in	12.3

Required Accessories	
Balancer, 25 - 30 kg	130.581.000

Accessories	
Blades, Set 10 Cable	170.013.047
Blades, Set 30 Standard	170.013.042

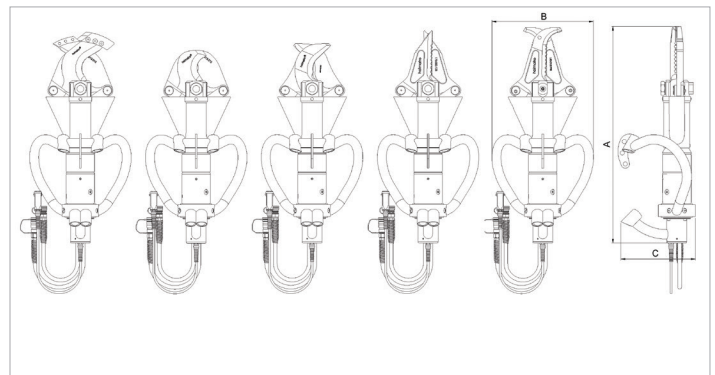

holmatro.com

© Holmatro 2024-07-04

While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. Holmatro B.V. and its affiliated companies (hereafter: Holmatro) cannot be held liable in any way for the consequences of activities undertaken on the basis of this printed matter. Values can vary within the manufacturer measurements. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro (T +31 (0)162-751480). Nothing from this printed matter can be copied and/or made public in any way without the explicit authorisation of Holmatro.